

Symptom:
Camera IP of HX-7S has been changed

Symptom

Camera IP of HX-7S has been changed and
Camera cannot connect with PC.

Are firewalls or virus protections disabled?

Yes

**Please deactivate firewall
or virus protections**

No

Do you have J-pad3?


Yes

**Please check and change
Camera IP using J-pad3**

J-PAD3 Set camera IP address

No

**Please connect monitor (or View finder) and Display port
cable to DP (Display port) of camera. And check Camera IP
that appears on monitor when booting up.**

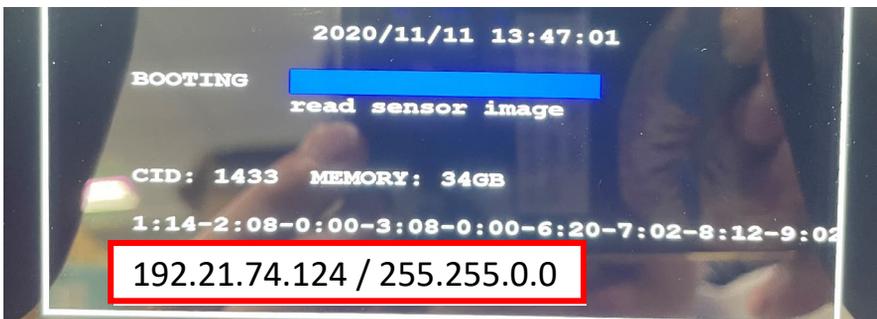

Camera IP address

Set IP address of PC as follows and reconnect with PC.

Ex) 192.21.74.124 (Camera IP)


192. 21 xx. xx (PC's IP)

XX.XX must be different from the IP address of Camera.



Please open HX Utility and change to appropriate camera IP.

- MLink

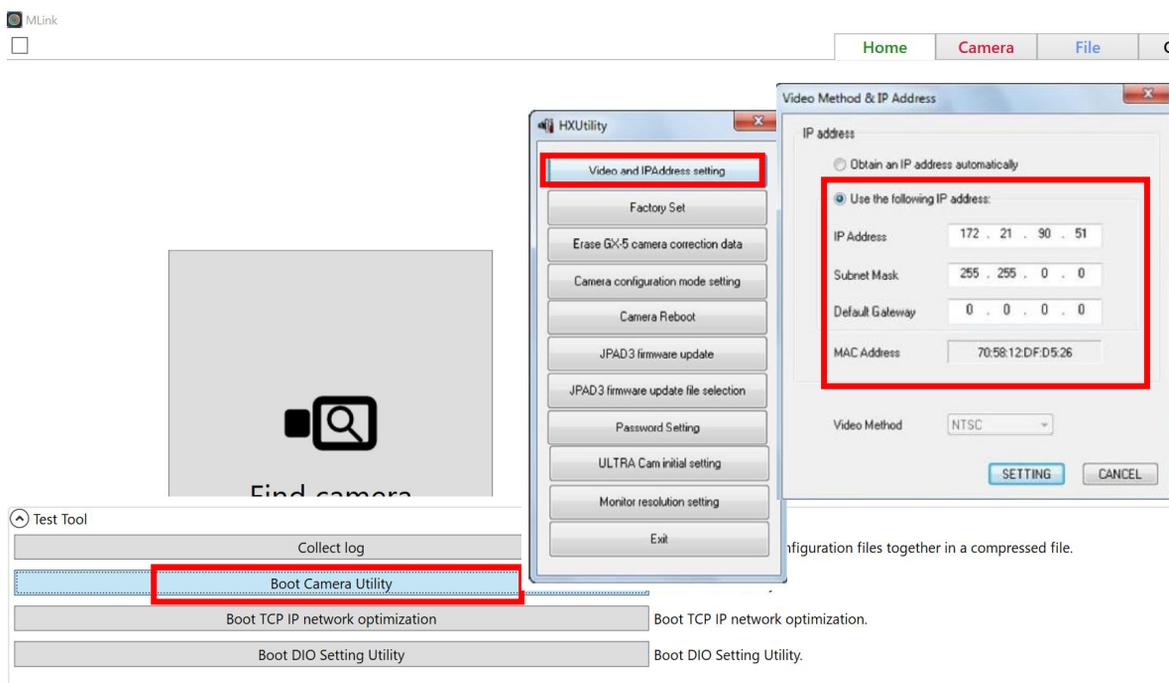

- HXLink

Please refer to following manual of HXUtility

HX utility set camera IP